

Fig. 030 / 72 PN25



Vanne à passage direct

- Corps acier
- Tige intérieure
- Contacts Inox
- Pour les eaux, vapeur, fluide thermique, agents non agressifs

Gate valve

- Cast steel
- Inside stem
- Seats in Stainless steel
- For non aggressive medium, water, steam


Keilrundschieber

- Stahlguss
- Innen Spindel
- Niro dichtend
- Für nicht aggressive Flüssigkeiten, Gas, Dampf

Dimensions entre brides selon DIN EN 558 – 1, série 15

Face to face dimensions according to DIN EN 558 – 1, series 15

Baulänge nach DIN EN 558 – 1, Grundreihe 15

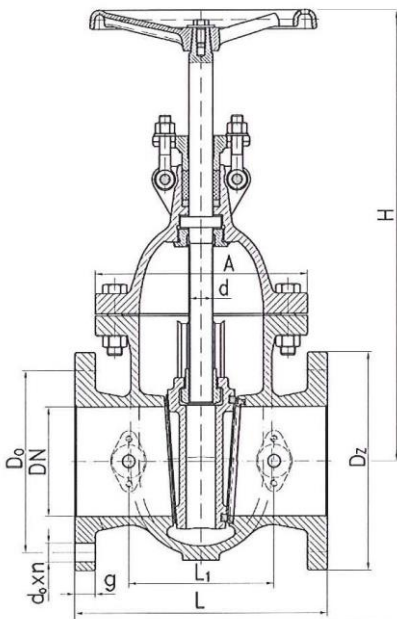

DN	L	Dz	D ₀	H	g	d ₀ x n	Dk	Poids
								Weight
								Gewicht
mm								kg
40	240	150	110	310	18	18 x 4	250	27
50	250	165	125	345	20	18 x 4	250	34
65	270	185	145	370	22	18 x 8	280	38
80	280	200	160	395	24	18 x 8	280	55
100	300	235	190	430	24	22 x 8	280	65
125	325	270	220	495	26	26 x 8	320	95
150	350	300	250	530	28	26 x 8	320	110
200	400	360	310	625	30	26 x 12	400	192
250	450	425	370	725	32	30 x 12	500	261
300	500	485	430	830	34	30 x 16	560	342
350	550	555	490	905	38	33 x 16	560	462
400	600	620	550	1040	40	36 x 16	720	691
500	700	730	660	1300	44	36 x 20	800	1098
600	800	845	770	1472	46	39 x 20	800	1580
700	900	960	875	1780	50	42 x 24	900	2300

Conditions de service

Working conditions

Betriebsdruck und Temperatur

Température (°C)	-30	40	100	150	200	250
Pression / Pressure / Druck (bar)	25	25	22	20	18	16

Matières / Materials / Material

Corps : GSC25N/GP240GH/1.0619N
Chapeau : GSC25N/GP240GH/1.0619N
Opércule : GSC25N/GP240GH/1.0619N
Volant : EN GJS-400
Tige : X 20 CR 13
Etanchéité de tige : Graphite
Sièges : X 20 CR 13
Etanchéité corps/chapeau : Metal-graphite

Body : GSC25N/GP240GH/1.0619N
Bonnet : GSC25N/GP240GH/1.0619N
Wedge : GSC25N/GP240GH/1.0619N
Handwheel : EN GJS-400
Stem : X 20 CR 13
Gland packing : Graphite
Seats : X 20 CR 13
Gasket body/bonnet : Metal-graphite

Gehäuse : GSC25N/GP240GH/1.0619N
Deckel : GSC25N/GP240GH/1.0619N
Keil : GSC25N/GP240GH/1.0619N
Handrad : EN GJS-400
Spindel : X20 CR13
Packung : Graphit
Sitzring : X20 CR13
Dichtung : Metal-graphit

04-2013



ROBINETTERIE INDUSTRIELLE
 30 rue Henri Durre - 59590 RAISMES
 Tél. 33 (0)3 27 36 70 12 - Fax 33 (0)3 27 36 75 20

CE PED 97/23



www.stemat-jansen.fr

Document non contractuel