

Fig. 282/635 PN40

Clapet de non retour


- A soupape
- Tout inox
- Pour eau, vapeur et agents agressifs

No return Check Valve

- Stainless steel
- For water, steam, thermic fluid and aggressive medium

Rückschlagventil

- Edelstahl
- Für Wasser, Dampf und aggressive Flüssigkeiten

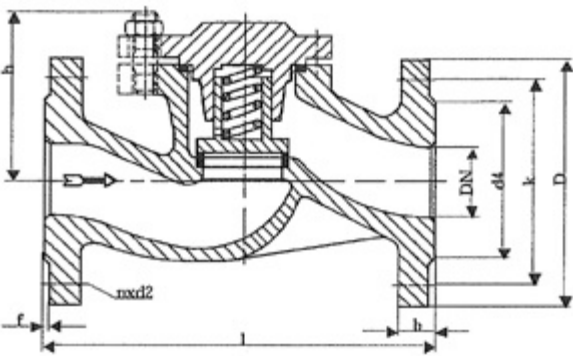

Dimensions entre brides selon DIN EN 558-1, série 1
Face to face dimensions according to DIN EN 558-1, series 1
Baulänge nach DIN EN 558-1, Grundreihe 1

DN	L	D	k	d ₄	h	n	d ₂	b	F	Poids
										Weight
										Gewicht
mm										kg
15	130	95	65	45	70	4	14	16	2	3
20	150	105	75	58	85	4	14	18	2	4,5
25	160	115	85	68	90	4	14	18	2	5
32	180	140	100	78	95	4	18	18	2	8
40	200	150	110	88	105	4	18	18	3	9
50	230	165	125	102	110	4	18	20	3	12
65	290	185	145	122	128	8	18	22	3	18
80	310	200	160	138	140	8	18	24	3	28
100	350	235	190	162	166	8	22	24	3	47
125	400	270	220	188	225	8	26	26	3	63
150	480	300	250	218	230	8	26	28	3	98
200	600	375	320	285	260	12	30	34	3	179

Conditions de service

Working conditions

Betriebsdruck und Temperatur

Température (°C)	0	120	200	300
Pression / Pressure / Druck (bar)	40	40	36	32

Matières / Materials / Material

- Corps :** Inox (X6 CRNIMO 1810)
- Chapeau :** Inox (X6 CRNIMO 1810)
- Clapet :** Inox (X10 CRNIMOTI 1810)
- Sièges :** Inox (X6 CRNIMO 1810)
- Ressort :** Inox (X12 CRNI 189)
- Joint corps/chapeau :** Graphite

- Body :** Stainless steel 316
- Bonnet :** Stainless steel 316
- Disc :** Stainless steel 316 Ti
- Seats :** Stainless steel 316
- Spring :** Stainless steel (X12 CRNI 189)
- Gasket body/bonnet :** Graphite

- Gehäuse :** 1.4408
- Deckel :** 1.4408
- Kegel :** 1.4571
- Sitzring :** 1.4408
- Feder :** 1.6900
- Dichtung :** Graphit

04-2013



ROBINETTERIE INDUSTRIELLE
 30 rue Henri Durre - 59590 RAISMES
 Tél. 33 (0)3 27 36 70 12 - Fax 33 (0)3 27 36 75 20

CE PED 97/23



www.stemat-jansen.fr

Document non contractuel